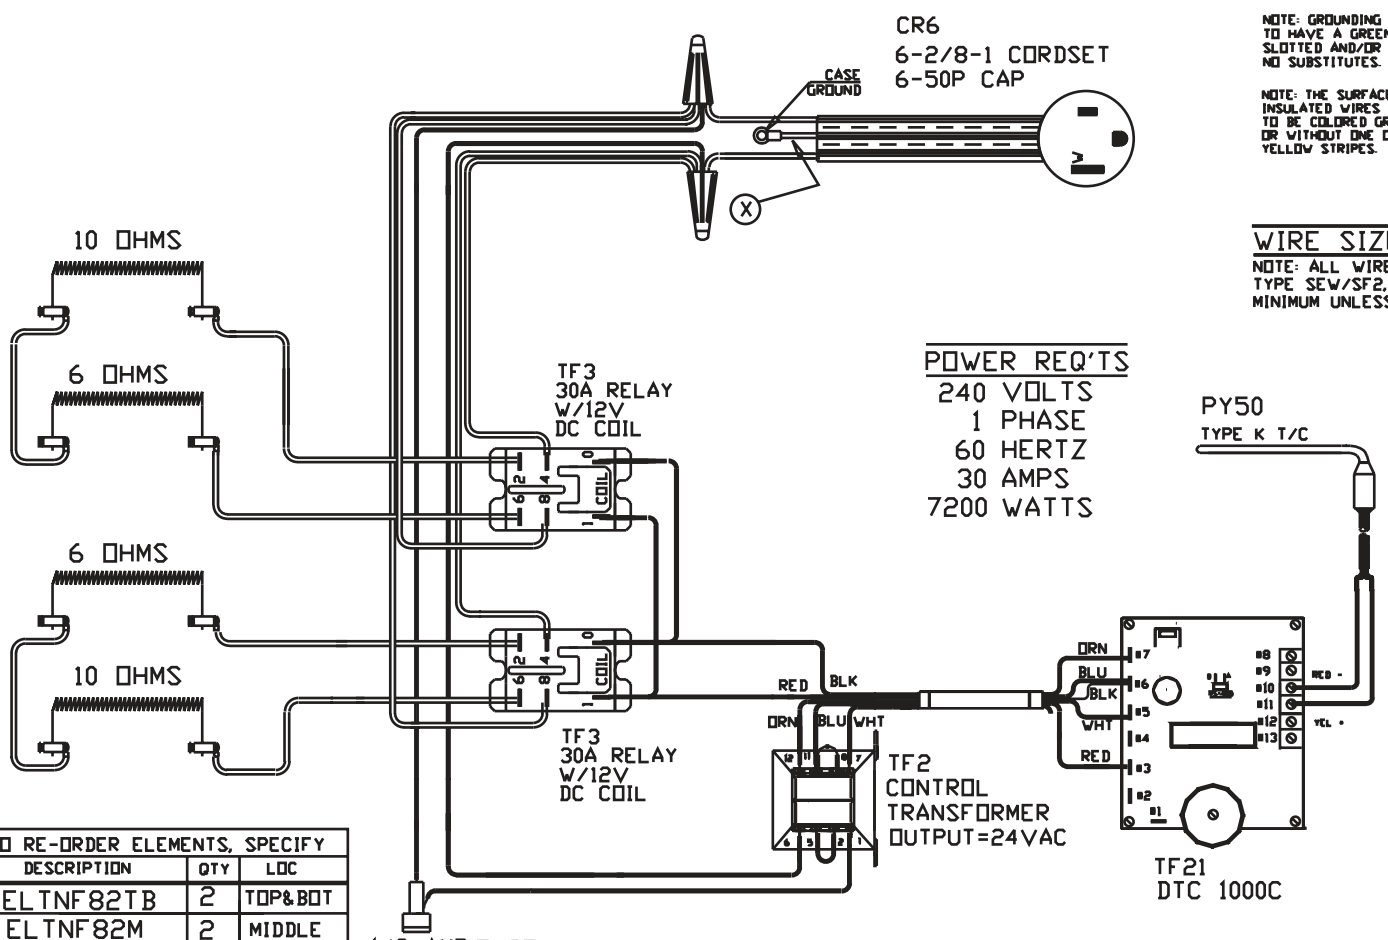

CAUTION

TO PROVIDE CONTINUED PROTECTION AGAINST THE RISK OF ELECTRIC SHOCK, CUSTOMER'S POWER SUPPLY MUST BE PROPERLY GROUNDED.

NOTE: GROUNDING SCREW TO HAVE A GREEN COLORED SLOTTED AND/OR HEX HEAD NO SUBSTITUTES. USE #1005

NOTE: THE SURFACE OF THE INSULATED WIRES MARKED (X) TO BE COLORED GREEN, WITH OR WITHOUT ONE OR MORE YELLOW STRIPES.

WIRE SIZES

NOTE: ALL WIRES TO BE TYPE SEW/SF2, #14 AWG MINIMUM UNLESS NOTED

POWER REQ'TS

240 VOLTS
1 PHASE
60 HERTZ
30 AMPS
7200 WATTS

TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LOC
ELTNF82TB	2	TOP&BOT
ELTNF82M	2	MIDDLE

UL/CUL LISTED

MAX TEMP 2300° F

COMMENTS	PARAGON INDUSTRIES 2011 SOUTH TOWN EAST BLVD MESQUITE,TEXAS 75149	PRODUCT DESCRIPTION 8 SIDES, 17.5"DIA, 17.5"DP 240V, 1PH, 60HZ, 30A, 7200W	PART NO. TNF82	REV -
			WIRING DIAGRAM	

PARBIW.DWG WEBSITE DWG